


### APPLICATION

Anchor slings are exclusively designed for anchoring a personal fall protection system, for example a reel of rope with a stopfor™ fall arrester.

Anchor slings comply with standard EN795 class B for transportable temporary anchorage devices. They are used to create an anchorage point on a structure which provides sufficient resistance (> 12 KN).

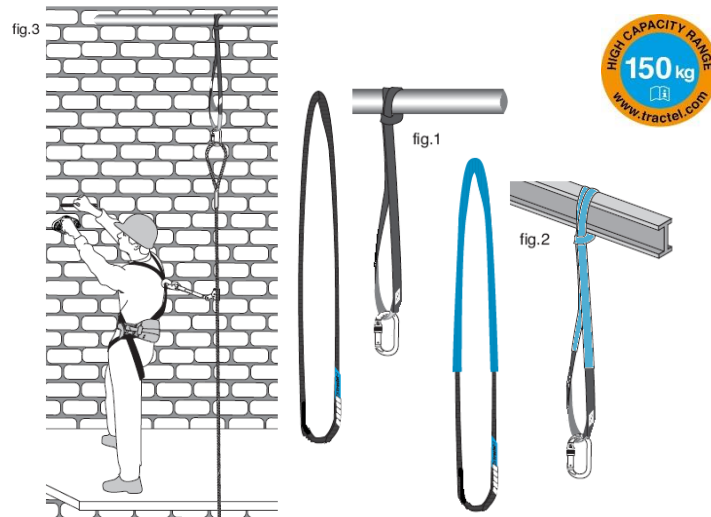

### TECHNICAL CHARACTERISTICS

- Temperature range - 30° C à + 60° C.
- Material: polyester of 30 mm

### DESCRIPTION

The anchor slings are available in two versions:

- A lightweight version (fig.1), which is available in different lengths: 0.6 to 2 m. The sling is made of 30 mm stitched polyester webbing.
- The anchor slings can be reinforced with a by tubular sheath (fig.2). The sheath provides optimum protection against cuts and abrasion. Tractel recommends the reinforced version as it provides a level o reliability and durability which is compatible with conditions encountered on building sites.

### NORM

- CE type examination certificate issued by Apave in accordance with standard EN 795 class B/2012 and CENTS16415/2013.

### CODE

AS30S 0,60	57272
AS30S 0,80	57282
AS30S 1,00	57292
AS30 1,20	59372
AS30 1,50	59382
AS30 2,00	59392
<b>Option :</b>	
Sleeve	18192